


DUAL ROW STRAIGHT HEADER

1362 SERIES. 1.27 x 1.27mm(0.050 x 0.050"). For PCB Solder


Features

- Available in 10 through 100 circuits
- Mates with 1.27mm(.050") dual row housing and socket
- Insulator Material: Polyester UL 94V-0.
- 0.40mm square brass pins
- Pin length and plating options are available
- For other options consult the Sales Office

Dimensional Information

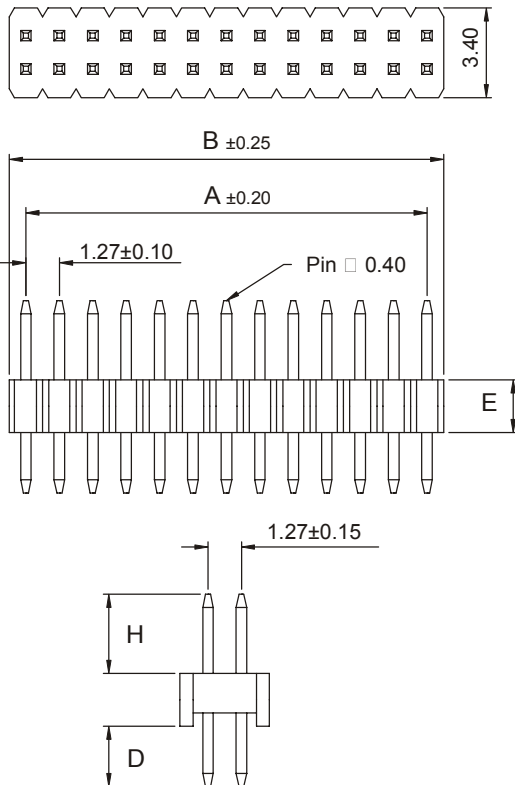

RECOMMENDED HOLE PATTERN



Ordering and Dimensional Information

Circuit Size	Part Number			Dimensions	
	E = 1 mm.	E = 1.5 mm.	E = 2.0 mm.	A	B
10	1362-T101C	1362-T102C	1362-T103C	5,08(0,200)	6,35(0,250)
12	1362-T121C	1362-T122C	1362-T123C	6,35(0,250)	7,62(0,300)
14	1362-T141C	1362-T142C	1362-T143C	7,62(0,300)	8,89(0,350)
16	1362-T161C	1362-T162C	1362-T163C	8,89(0,350)	10,16(0,400)
18	1362-T181C	1362-T182C	1362-T183C	10,16(0,400)	11,43(0,450)
20	1362-T201C	1362-T202C	1362-T203C	11,43(0,450)	12,70(0,500)
22	1362-T221C	1362-T222C	1362-T223C	12,70(0,500)	13,97(0,550)
24	1362-T241C	1362-T242C	1362-T243C	13,97(0,550)	15,24(0,600)
26	1362-T261C	1362-T262C	1362-T263C	15,24(0,600)	16,51(0,650)
28	1362-T281C	1362-T282C	1362-T283C	16,51(0,650)	17,78(0,700)
30	1362-T301C	1362-T302C	1362-T303C	17,78(0,700)	19,05(0,750)
32	1362-T321C	1362-T322C	1362-T323C	19,05(0,750)	20,32(0,800)
34	1362-T341C	1362-T342C	1362-T343C	20,32(0,800)	21,59(0,850)
36	1362-T361C	1362-T362C	1362-T363C	21,59(0,850)	22,86(0,900)
38	1362-T381C	1362-T382C	1362-T383C	22,86(0,900)	24,13(0,950)
40	1362-T401C	1362-T402C	1362-T403C	24,13(0,950)	25,40(1,000)
42	1362-T421C	1362-T422C	1362-T423C	25,40(1,000)	26,67(1,050)
44	1362-T441C	1362-T442C	1362-T443C	26,67(1,050)	27,94(1,100)
46	1362-T461C	1362-T462C	1362-T463C	27,94(1,100)	29,21(1,150)
48	1362-T481C	1362-T482C	1362-T483C	29,21(1,150)	30,48(1,200)
50	1362-T501C	1362-T502C	1362-T503C	30,48(1,200)	31,75(1,250)
52	1362-T521C	1362-T522C	1362-T523C	31,75(1,250)	33,02(1,300)
54	1362-T541C	1362-T542C	1362-T543C	33,02(1,300)	34,29(1,350)
56	1362-T561C	1362-T562C	1362-T563C	34,29(1,350)	35,56(1,400)
58	1362-T581C	1362-T582C	1362-T583C	35,56(1,400)	36,83(1,450)
60	1362-T601C	1362-T602C	1362-T603C	36,83(1,450)	38,10(1,500)
62	1362-T621C	1362-T622C	1362-T623C	38,10(1,500)	39,37(1,550)
64	1362-T641C	1362-T642C	1362-T643C	39,37(1,550)	40,64(1,600)
66	1362-T661C	1362-T662C	1362-T663C	40,64(1,600)	41,91(1,650)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel
- T = 13. Selective gold flash over 50µ" nickel
- T = 15. 15µ" selective gold over 50µ" nickel
- T = 16. 30µ" selective gold over 50µ" nickel

C = Pin Length

- C = 1. H = 3.00mm D = 2.30mm
- C = 2. H = 2.00mm D = 2.00mm