


DUAL ROW STRAIGHT HEADER DOUBLE BASE

1366 SERIE 1.27 x 1.27 mm. (0.050 x 0.050"). For PCB solder


Features

- Available in 10 through 100 circuits
- Conecta con cajas y conectores d/ fila paso 1.27 mm.
- Material: Termoplastico UL 94V-0
- Without polarisation
- 0.40 mm. Square pin in phosphor bronze
- Different plating options are available
- For other options consult the Sales Office

Dimensional Information

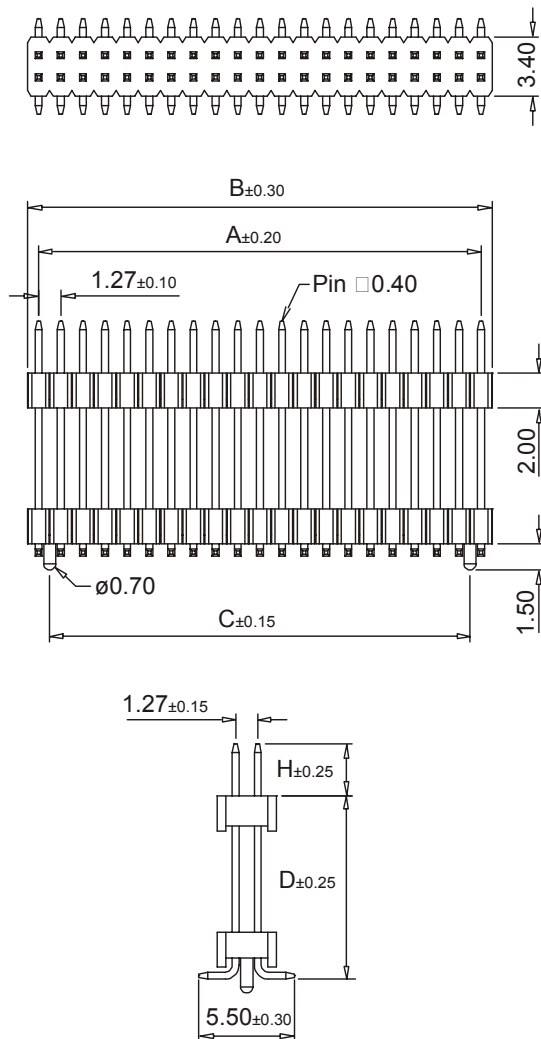

RECOMMENDED PCB LAYOUT

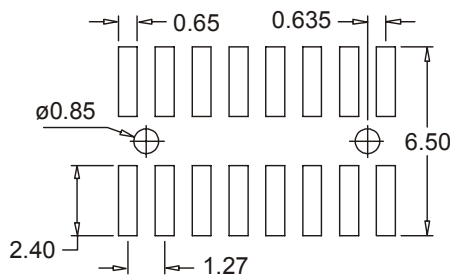

Ordering And Dimensional Information

1366 - T- XX- P- L- E
 1 2 3 4 5 6

1. Conector Serie

2. Contact Plating

- T = 2. Tin-plated.
- T = 3. Gold flash over 1.27 μ Ni.
RECOMMENDED FINISH
- T = 5. 0.38 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.

3. (XX) Circuit Size

- Available in 10 through 100 circuits
 (For 100 circuits replace XX with 00)

4.(P) Fixing Post

- P = 1. Without fixing post
- P = 2. With fixing post

5. Conector Height

- L = 1. H = 4.80 mm.; D = 3.00
- L = 2. H = 3.00 mm.; D = 6.00
- L = 3. H = 2.80 mm.; D = 8.50
- L = 4. H = 7.00 mm.; D = 11.20
- L = 5. H = 4.00 mm.; D = 8.40

6. (E) Packing Options

- E = 1. Tube + Plastic Cover
- E = 2. Reel + Plastic Cover

DIMENSIONS:

$$A = 1.27 \left(\frac{XX}{2} - 1 \right) \quad B = 1.27 \left(\frac{XX}{2} \right) \quad C = 1.27 \left(\frac{XX}{2} - 2 \right)$$

XX = Number of circuits