

# FLEXIBLE PRINTED CIRCUIT CONNECTOR







## 2604 SERIES. 2.54mm(0.100"). Straight Connector. For PCB Solder

### Features



- Available in 6 through 27 circuits
- Insulator Material: Glass-filled polyester UL 94V-0
- Low insertion force
- Tin lead plated contact. High reliability
- Accommodates 0.30mm thickness FFC/FPC
- Colour: Black

### Dimensional Information

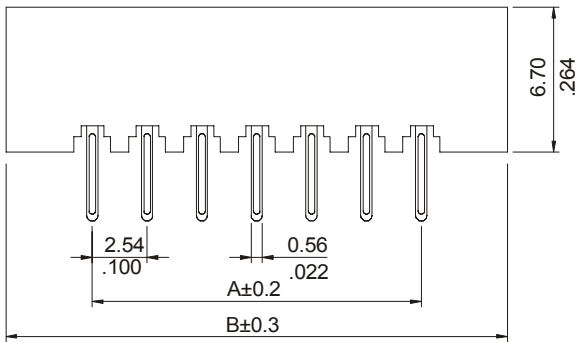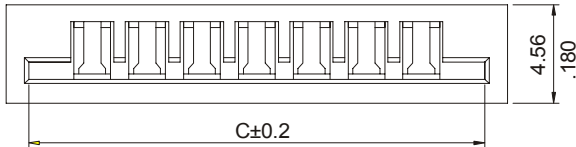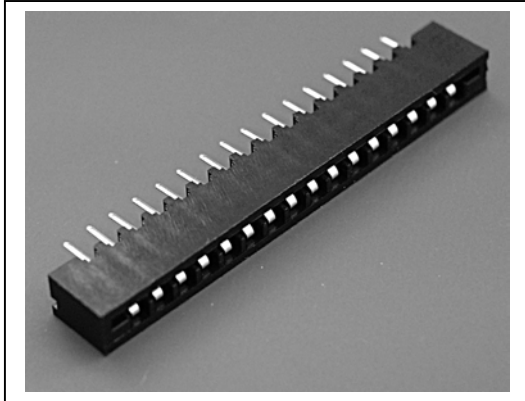

### Ordering and Dimensional Information

| Circuit Size | Part Number | Dimensions   |              |              |
|--------------|-------------|--------------|--------------|--------------|
|              |             | A            | B            | C            |
| 06           | 2604-2061   | 12,70(0,500) | 20,40(0,803) | 18,38(0,724) |
| 07           | 2604-2071   | 15,24(0,600) | 22,94(0,903) | 20,92(0,824) |
| 08           | 2604-2081   | 17,78(0,700) | 25,48(1,003) | 23,46(0,924) |
| 09           | 2604-2091   | 20,32(0,800) | 28,02(1,103) | 26,00(1,024) |
| 10           | 2604-2101   | 22,86(0,900) | 30,56(1,203) | 28,54(1,124) |
| 11           | 2604-2111   | 25,40(1,000) | 33,10(1,303) | 31,08(1,224) |
| 12           | 2604-2121   | 27,94(1,100) | 35,64(1,403) | 33,62(1,324) |
| 13           | 2604-2131   | 30,48(1,200) | 38,18(1,503) | 36,16(1,424) |
| 14           | 2604-2141   | 33,02(1,300) | 40,72(1,603) | 38,70(1,524) |
| 15           | 2604-2151   | 35,56(1,400) | 43,26(1,703) | 41,24(1,624) |
| 16           | 2604-2161   | 38,10(1,500) | 45,80(1,803) | 43,78(1,724) |
| 17           | 2604-2171   | 40,64(1,600) | 48,34(1,903) | 46,32(1,824) |
| 18           | 2604-2181   | 43,18(1,700) | 50,88(2,003) | 48,86(1,924) |
| 19           | 2604-2191   | 45,72(1,800) | 53,42(2,103) | 51,40(2,024) |
| 20           | 2604-2201   | 48,26(1,900) | 55,96(2,203) | 53,94(2,124) |
| 21           | 2604-2211   | 50,80(2,000) | 58,50(2,303) | 56,48(2,224) |
| 22           | 2604-2221   | 53,34(2,100) | 61,04(2,403) | 59,02(2,324) |
| 23           | 2604-2231   | 55,88(2,200) | 63,58(2,503) | 61,56(2,424) |
| 24           | 2604-2241   | 58,42(2,300) | 66,12(2,603) | 64,10(2,524) |
| 25           | 2604-2251   | 60,96(2,400) | 68,66(2,703) | 66,64(2,624) |
| 26           | 2604-2261   | 63,50(2,500) | 71,20(2,803) | 69,18(2,724) |
| 27           | 2604-2271   | 66,04(2,600) | 73,74(2,903) | 71,72(2,824) |

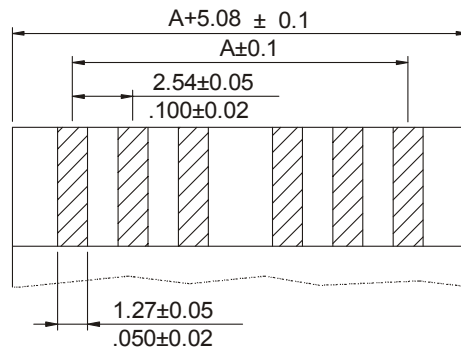

Accommodated FFC / FPC  
(Thickness: 0.3mm)