

1.00mm CENTRE SPACING FLAT CABLE

9100 SERIES. AWG 28 (7 x 36 AWG). 1.00mm (0.0394")


Features

- Available in 20, 22, 24, 26, 30, 34, 36, 40, 44, 50 and 68 ways
- Insulator material: PVC, colour grey
- Flame test: UL-VW-1 CSA-FT1
- Conductor material: Stranded copper
- With lateral colour strip
- Temperature Rating: -20°C to +105°C
- Impedance: 100 Ω
- Capacitance: 14.20 pF/ft
- Inductance: 0.14 μ H/ft
- Propagation delay: 1.43 nseg/ft
- Insulation resistance: 1G Ω /m Min.
- UL E162690

Dimensional Information

Ordering and Dimensional Information

Polarisation Mark

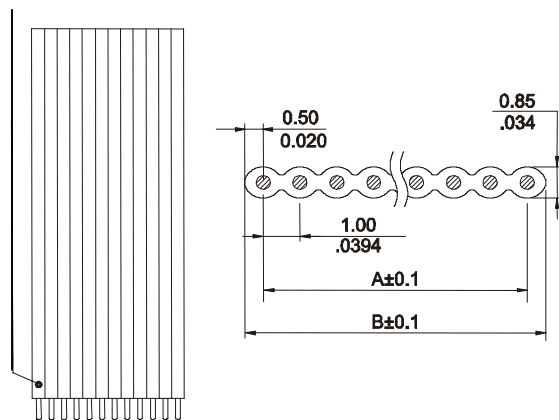

Circuit Size	Part Number	Dimensions	
		A	B
20	9100 - 2028	19.00 (0.749)	20.00 (0.787)
22	9100 - 2228	21.00 (0.827)	22.00 (0.866)
24	9100 - 2428	23.00 (0.906)	24.00 (0.945)
26	9100 - 2628	25.00 (0.985)	26.00 (1.024)
30	9100 - 3028	29.00 (1.142)	30.00 (1.181)
34	9100 - 3428	33.00 (1.300)	34.00 (1.339)
36	9100 - 3628	35.00 (1.378)	36.00 (1.418)
40	9100 - 4028	39.00 (1.536)	40.00 (1.575)
44	9100 - 4428	43.00 (1.693)	44.00 (1.733)
50	9100 - 5028	49.00 (1.930)	50.00 (1.969)
68	9100 - 6828	67.00 (2.638)	68.00 (2.678)

Note: For other circuit sizes
Consult the Sales Office