




# DUAL ROW STRAIGHT HEADER

## 2026 SERIES 2.00mm (0.079") PCB Solder

### Features

- Available in 4 through 80 circuits
- Mates with 2.00mm (.079") dual row housing and socket
- Easy breakaway to desired circuits
- Insulator Material: Polyester UL 94V-0, Nylon 6T
- 0.40mm square pin in copper alloy
- Different pin length and plating options are available
- For other options consult the Sales Office

### Dimensional Information

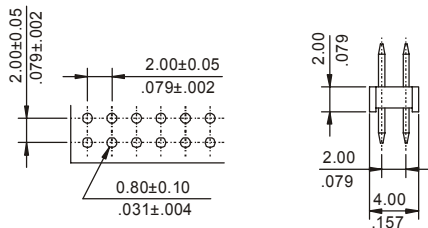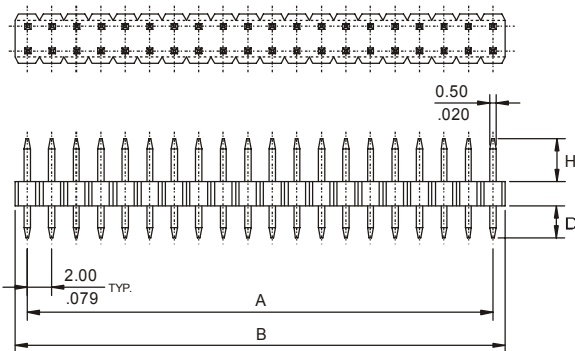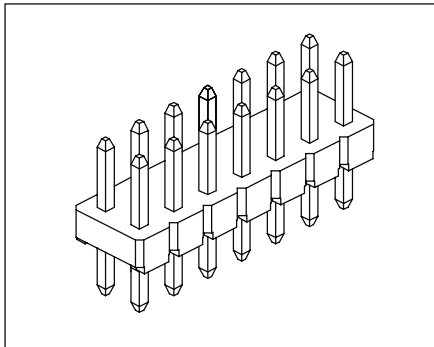

RECOMMENDED HOLE PATTERN

### T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel  
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel
- T = 13. Selective gold flash over 50µ" nickel
- T = 15. 15µ" selective gold over 50µ" nickel
- T = 16. 30µ" selective gold over 50µ" nickel

### Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
04	2026 - T04C	2,00(0,079)	4,00(0,157)
06	2026 - T06C	4,00(0,157)	6,00(0,236)
08	2026 - T08C	6,00(0,236)	8,00(0,315)
10	2026 - T10C	8,00(0,315)	10,00(0,394)
12	2026 - T12C	10,00(0,394)	12,00(0,472)
14	2026 - T14C	12,00(0,472)	14,00(0,551)
16	2026 - T16C	14,00(0,551)	16,00(0,630)
18	2026 - T18C	16,00(0,630)	18,00(0,709)
20	2026 - T20C	18,00(0,709)	20,00(0,787)
22	2026 - T22C	20,00(0,787)	22,00(0,866)
24	2026 - T24C	22,00(0,866)	24,00(0,945)
26	2026 - T26C	24,00(0,945)	26,00(1,024)
28	2026 - T28C	26,00(1,024)	28,00(1,102)
30	2026 - T30C	28,00(1,102)	30,00(1,181)
32	2026 - T32C	30,00(1,181)	32,00(1,260)
34	2026 - T34C	32,00(1,260)	34,00(1,339)
36	2026 - T36C	34,00(1,339)	36,00(1,417)
38	2026 - T38C	36,00(1,417)	38,00(1,496)
40	2026 - T40C	38,00(1,496)	40,00(1,575)
42	2026 - T42C	40,00(1,575)	42,00(1,654)
44	2026 - T44C	42,00(1,654)	44,00(1,732)
46	2026 - T46C	44,00(1,732)	46,00(1,811)
48	2026 - T48C	46,00(1,811)	48,00(1,890)
50	2026 - T50C	48,00(1,890)	50,00(1,969)
52	2026 - T52C	50,00(1,969)	52,00(2,047)
54	2026 - T54C	52,00(2,047)	54,00(2,126)
56	2026 - T56C	54,00(2,126)	56,00(2,205)
58	2026 - T58C	56,00(2,205)	58,00(2,283)
60	2026 - T60C	58,00(2,283)	60,00(2,362)
62	2026 - T62C	60,00(2,362)	62,00(2,441)
64	2026 - T64C	62,00(2,441)	64,00(2,520)
66	2026 - T66C	64,00(2,520)	66,00(2,598)
68	2026 - T68C	66,00(2,598)	68,00(2,677)
70	2026 - T70C	68,00(2,677)	70,00(2,756)
72	2026 - T72C	70,00(2,756)	72,00(2,835)
74	2026 - T74C	72,00(2,835)	74,00(2,913)
76	2026 - T76C	74,00(2,913)	76,00(2,992)
78	2026 - T78C	76,00(2,992)	78,00(3,071)
80	2026 - T80C	78,00(3,071)	80,00(3,150)

### C = Pin Length

- C = 0. H = 3.50mm ; D = 2.60mm
- C = 1. H = 4.00mm ; D = 2.80mm
- C = 2. H = 8.00mm ; D = 2.80mm
- C = 3. H = 9.00mm ; D = 2.80mm
- C = 4. H = 7.50mm ; D = 2.80mm
- C = 5. H = 6.00mm ; D = 2.80mm
- C = 6. H = 8.00mm ; D = 8.00mm
- C = 7. H = 10.00mm ; D = 8.00mm
- C = 8. H = 11.00mm ; D = 8.00mm
- C = 9. H = 11.00mm ; D = 2.80mm
- C = 10. H = 4.40 mm. ; D = 8.00 mm.