CRIMP TERMINAL SOCKET

Leotronics

2574 SERIES 2.50mm (0.098")For Male Terminal

Features

- Available in 2 through 12 circuits
- Material : Nylon 6/6 UL94V-0
- With or without mounting ears
- Accepts 2573 series crimp terminal
- Mates with 2570 series housings
- Wire to wire and panel application

Dimensional Information

Ordering and Dimensional Information

Circuit Size	Part Number		Dimensions					
	With ears	Without ears	A	B	C	D	E	F
2	**2574 - 2021**	**2574 – 2022**	2,50(0,098)	6.20 (0.244)	8.60 (0.338)	2,50(0,098)	5.80 (0.228)	12.40 (0.488)
3	**2574 – 2031**	**2574 – 2032**	5,00(0,197)	8.70 (0.342)	11.10 (0.437)	5,00(0,197)	8.30 (0.327)	14.90 (0.587)
4	**2574 – 2041**	**2574 – 2042**	7,50(0,295)	11.20 (0.440)	13.60 (0.535)	7,50(0,295)	10.80 (0.425)	17.40 (0.685)
5	**2574 – 2051**	**2574 – 2052**	10,00 (0.393)	13.70 (0.539)	16.10 (0.633)	3.70 (0.145)	13.30 (0.524)	19.90 (0.783)
6	**2574 – 2061**	**2574 – 2062**	12.50 (0.492)	16.20 (0.637)	18.60 (0.732)	5.00 (0.197)	15.80 (0.622)	22.40 (0.882)
7	**2574 – 2071**	**2574 – 2072**	15.00 (0.591)	18.70 (0.763)	21.10 (0.830)	5.00 (0.197)	18.30 (0.720)	24.90 (0.980)
8	**2574 – 2081**	**2574 – 2082**	17.50 (0.689)	21.20 (0.834)	23.60 (0.929)	5.00 (0.197)	20.80 (0.819)	27.40 (1.079)
9	**2574 – 2091**	**2574 – 2092**	20.00 (0.787)	23.70 (0.933)	26.10 (1.027)	5.00 (0.197)	23.30 (0.917)	29.90 (1.177)
10	**2574 – 2101**	**2574 – 2102**	22.50 (0.886)	26.20 (1.031)	28.60 (1.125)	5.00 (0.197)	25.80 (1.016)	32.40 (1.276)
11	**2574 – 2111**	**2574 – 2112**	25.00 (0.984)	28.70 (1.130)	31.10 (1.224)	5.00 (0.197)	28.30 (1.114)	34.90 (1.374)
12	**2574 - 2121**	**2574 – 2122**	27.50 (1.083)	31.20 (1.228)	33.60 (1.323)	5.00 (0.197)	30.80 (1.213)	37.40 (1.472)

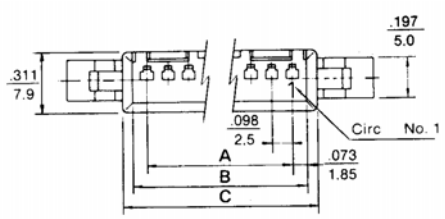

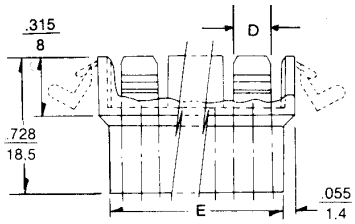

RECOMMENDED HOLE PATTERN



MALE CRIMP TERMINAL

2573 SERIES 2.50mm Crimp Terminal

Features

- Rigid contact
- Accommodates wires ranges AWG 22-28
- Material : Pre-tinned copper alloy
- Mates with 2574 series socket
- Insulation diameter 1.90mm(0.075)

Dimensional Information

Ordering and Dimensional Information

Reel Quantity	Part Number	Material	Wire Ranges	Insulation Diameter
10.000 Pcs (Reel)	**2573 - 2000**	Copper alloy	AWG 22 – 28	1.90 (0.075") Max.
Loose Piece	**2573 - 2001**	Copper alloy	AWG 22 – 28	1.90 (0.075") Max.