

# SINGLE ROW CRIMP CONNECTOR SYSTEM


## 2866 SERIES 2.54mm (0.100") Single Row Connector

### Features

- Available in 2 through 12 circuits
- Insulation Material: Glass filled polyester UL 94V-0
- Available with polarising and locking latch
- Accepts 2870 series crimp terminal
- Mates with 2.54mm pitch single row headers and 2867 and 2868 series headers

### Dimensional Information

### Ordering and Dimensional Information

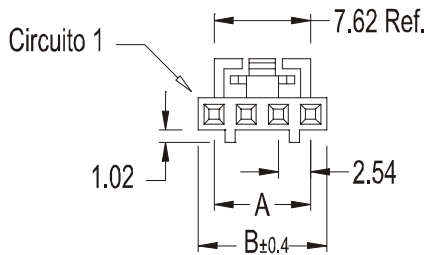

Circuit Size	Part Number	Dimensions	
		A	B
02	<b>2866-202C</b>	2,54(0,100)	5,05(0,199)
03	<b>2866-203C</b>	5,08(0,200)	7,59(0,299)
04	<b>2866-204C</b>	7,62(0,300)	10,13(0,399)
05	<b>2866-205C</b>	10,16(0,400)	12,67(0,499)
06	<b>2866-206C</b>	12,70(0,500)	15,21(0,599)
07	<b>2866-207C</b>	15,24(0,600)	17,75(0,699)
08	<b>2866-208C</b>	17,78(0,700)	20,29(0,799)
09	<b>2866-209C</b>	20,32(0,800)	22,83(0,899)
10	<b>2866-210C</b>	22,86(0,900)	25,37(0,999)
11	<b>2866-211C</b>	25,40(1,000)	27,91(1,099)
12	<b>2866-212C</b>	27,94(1,100)	30,45(1,199)

### Posición pestañas de anclaje



2P

3P

