5.33mm FOOTPRINT D-SUB RECEPTACLE

Leotronics

8005 SERIES PCB Solder Low Profile

Features

- Available in 9 and 25 Circuits
- Insulator Material: Glass filled polyester UL 94V-0
- Contact Material: Phosphor Bronze
- Different plating options are available
- Shell: Steel, tin plated as standard
- Standard connector C = 1 (Riveted ground hooks with 4-40 UNC thread)
- For other options consult the Sales Office

Dimensional Information **Ordering and Dimensional Information**

Circuit Size	Part Number	Dimensions		
		A	B	C
9	**8005 – T09**C	25.00 (0.984)	30.80 (1.213)	16.30 (0.642)
25	**8005 – T25**C	47.04 (1.852)	53.10 (2.091)	38.30 (1.508)

T = Contact Plating

- T = **3.** Gold flash over 50µ" nickel.
- T = **4.** 10µ" gold over 50µ" nickel
- T = **5.** 15µ" gold over 50µ" nickel
- T = **6.** 30µ" gold over 50µ" nickel

C = Hardware Options

- C = **1.** Riveted ground hooks pre-loaded 4.40 UNC Hex screws
- C = **0.** Riveted ground hooks with 4.40 UNC thread

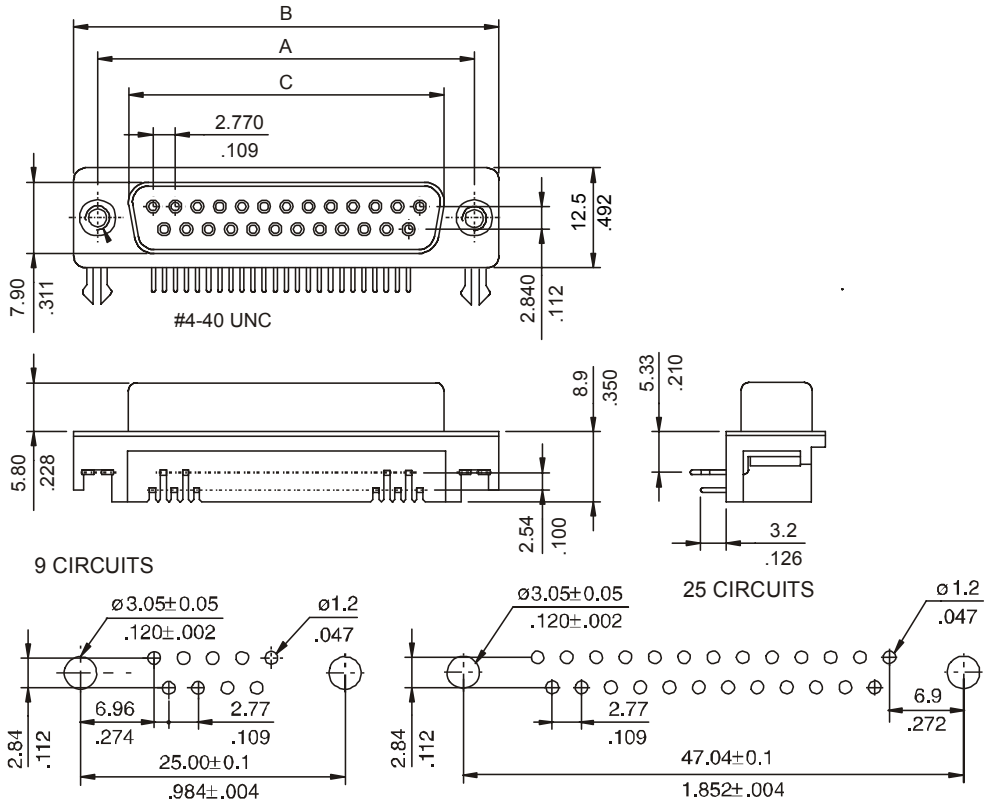

RECOMMENDED HOLE PATTERN