RIGHT ANGLE D-SUB CONNECTOR

Leotronics

8098-8099 SERIES Right Angle PCB Solder Slim Version

Features

- Available in 9 and 25 Cir Female and 9 Cir Male
- Insulator Material: Glass Filled Thermoplastic UL 94V-0
- Metal shell: Tin plated
- Contact Material: Phosphor Bronze
- Rear Fully Insulated
- Available in Different Plating Options
- The Standard Version Includes: Grounding Tag L2 with 4-40 UNC Clinch Nut
- For further Options please Contact our Sales Department

Dimensional Information

FEMALE CONNECTOR

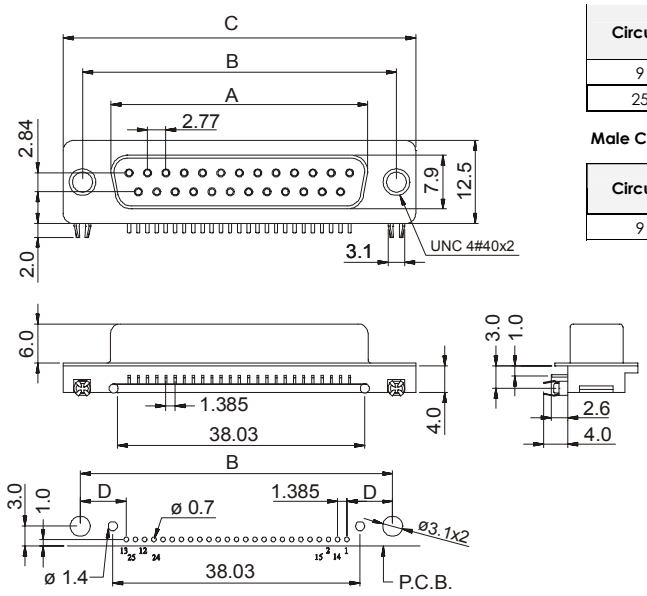

RECOMMENDED HOLE PATTERN

MALE CONNECTOR

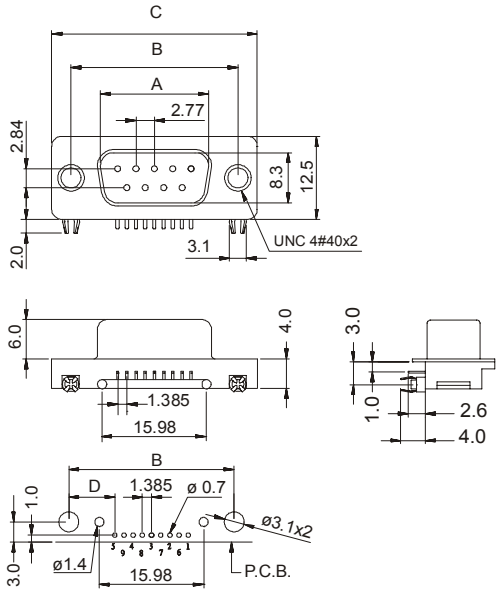

RECOMMENDED HOLE PATTERN

Ordering and Dimensional Information

Female Connector

Circuits		Dimensions			
		A	B	C	D
9	**8098-T09C**	16.30 (0.642)	25.00 (0.984)	30.80 (1.212)	6.95 (0.273)
25	**8098-T25C**	38.30 (1.507)	47.10 (1.854)	53.10 (2.090)	6.93 (0.272)

Male Connector

Circuits					
		A	B	C	D
9	**8099-T09C**	19.92 (0.784)	25.00 (0.984)	30.80 (1.212)	6.95 (0.273)

T = Contact Plating

- T = **3** Gold Flash over 1.27µ" Ni.
- T = **4** 0.25µ" Gold over 1.27µ" Ni.
- T = **5** 0.50µ" Gold over 1.27µ" Ni.
- T = **6** 0.75µ" Gold over 1.27 µ" Ni.

C = Connector Options
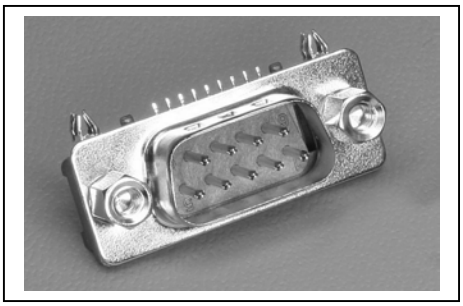
- C = **1** With Grounding Tag L2 and 4-40 UNC Clinch Nut
- C = **0** With Grounding Tag L2 and 4-40 UNC Threaded Insert