


# STRAIGHT POLARIZED HEADER SMT

## 1575 SERIES. 1.50 mm (0.059"). For PCB Solder

### Features

- Available in 2 through 13 circuits
- Material: Nylon 6/6 UL 94V-0
- Tinned brass conductor
- Mates with 1570 serie
- Low profil

### Dimensional Information

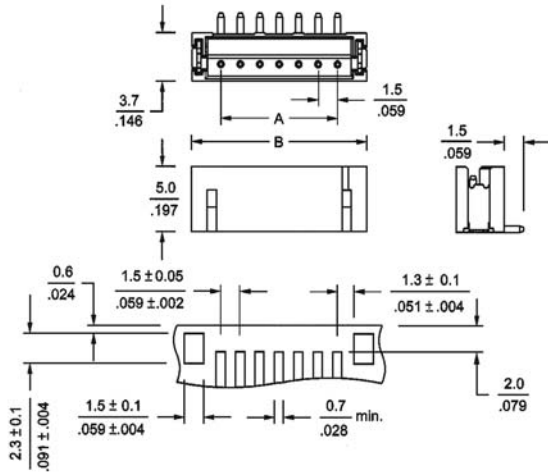

### Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	1575-2021	1,50(0,059)	4,50(0,177)
03	1575-2031	3,00(0,118)	6,00(0,236)
04	1575-2041	4,50(0,177)	7,50(0,295)
05	1575-2051	6,00(0,236)	9,00(0,354)
06	1575-2061	7,50(0,295)	10,50(0,413)
07	1575-2071	9,00(0,354)	12,00(0,472)
08	1575-2081	10,50(0,413)	13,50(0,531)
09	1575-2091	12,00(0,472)	15,00(0,591)
10	1575-2101	13,50(0,531)	16,50(0,650)
11	1575-2111	15,00(0,591)	18,00(0,709)
12	1575-2121	16,50(0,650)	19,50(0,768)
13	1575-2131	18,00(0,709)	21,00(0,827)


# RIGHT ANGLE POLARIZED HEADER SMT

## 1576 SERIES. 1.50 mm (0.059"). For PCB Solder

### Features

- Available in 2 through 13 circuits
- Material: Nylon 6/6 UL 94V-0
- Tinned brass conductor
- Mates with 1570 serie
- Low profil

### Dimensional Information

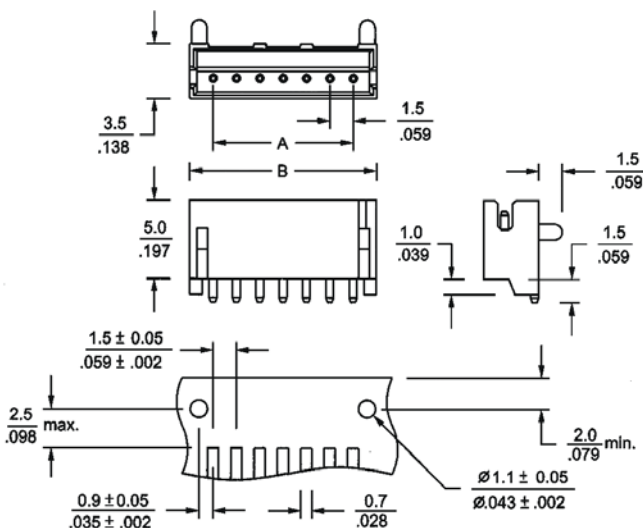

### Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	1576-2021	1,50(0,059)	4,50(0,177)
03	1576-2031	3,00(0,118)	6,00(0,236)
04	1576-2041	4,50(0,177)	7,50(0,295)
05	1576-2051	6,00(0,236)	9,00(0,354)
06	1576-2061	7,50(0,295)	10,50(0,413)
07	1576-2071	9,00(0,354)	12,00(0,472)
08	1576-2081	10,50(0,413)	13,50(0,531)
09	1576-2091	12,00(0,472)	15,00(0,591)
10	1576-2101	13,50(0,531)	16,50(0,650)
11	1576-2111	15,00(0,591)	18,00(0,709)
12	1576-2121	16,50(0,650)	19,50(0,768)
13	1576-2131	18,00(0,709)	21,00(0,827)