


1.27mm SINGLE ROW DOUBLE BODY HEADER

1353 SERIES. 1.27mm(0.050"). SMT Solder


Features

- Available in 3 through 33 circuits
- Mates with 1.27mm single row housing and sockets
- Insulator Material: Thermoplastic UL 94V-0
- Different plating options are available
- 0.46mm square pin in copper alloy
- Different pin lengths are available
- For other options consult the Sales Office

Dimensional Information

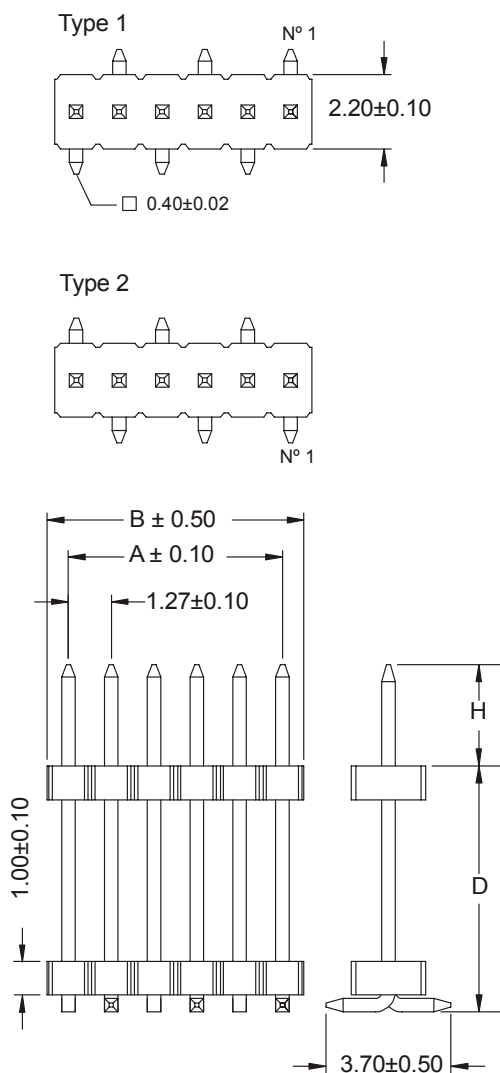

RECOMMENDED PCB LAYOUT

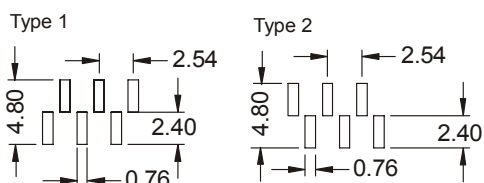

Ordering and Dimensional Information

Circuit Size	Part Number		Dimensions	
	Type 1	Type 2	A	B
03	1353-T031C	1353-T032C	2,54(0,100)	3,81(0,200)
04	1353-T041C	1353-T042C	3,81(0,200)	5,08(0,200)
05	1353-T051C	1353-T052C	5,08(0,250)	6,35(0,250)
06	1353-T061C	1353-T062C	6,35(0,300)	7,62(0,300)
07	1353-T071C	1353-T072C	7,62(0,350)	8,89(0,350)
08	1353-T081C	1353-T082C	8,89(0,400)	10,16(0,400)
09	1353-T091C	1353-T092C	10,16(0,450)	11,43(0,450)
10	1353-T101C	1353-T102C	11,43(0,500)	12,70(0,500)
11	1353-T111C	1353-T112C	12,70(0,550)	13,97(0,550)
12	1353-T121C	1353-T122C	13,97(0,600)	15,24(0,600)
13	1353-T131C	1353-T132C	15,24(0,650)	16,51(0,650)
14	1353-T141C	1353-T142C	16,51(0,700)	17,78(0,700)
15	1353-T151C	1353-T152C	17,78(0,750)	19,05(0,750)
16	1353-T161C	1353-T162C	19,05(0,800)	20,32(0,800)
17	1353-T171C	1353-T172C	20,32(0,850)	21,59(0,850)
18	1353-T181C	1353-T182C	21,59(0,900)	22,86(0,900)
19	1353-T191C	1353-T192C	22,86(0,950)	24,13(0,950)
20	1353-T201C	1353-T202C	24,13(1,000)	25,40(1,000)
21	1353-T211C	1353-T212C	25,40(1,050)	26,67(1,050)
22	1353-T221C	1353-T222C	26,67(1,100)	27,94(1,100)
23	1353-T231C	1353-T232C	27,94(1,150)	29,21(1,150)
24	1353-T241C	1353-T242C	29,21(1,200)	30,48(1,200)
25	1353-T251C	1353-T252C	30,48(1,250)	31,75(1,250)
26	1353-T261C	1353-T262C	31,75(1,300)	33,02(1,300)
27	1353-T271C	1353-T272C	33,02(1,350)	34,29(1,350)
28	1353-T281C	1353-T282C	34,29(1,400)	35,56(1,400)
29	1353-T291C	1353-T292C	35,56(1,450)	36,83(1,450)
30	1353-T301C	1353-T302C	36,83(1,500)	38,10(1,500)
31	1353-T311C	1353-T312C	38,10(1,550)	39,37(1,550)
32	1353-T321C	1353-T322C	39,37(1,600)	40,64(1,600)
33	1353-T331C	1353-T332C	40,64(1,650)	41,91(1,650)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

C = Pin Length

- C = 1. D = 2.60 mm. H = 3.00mm
- C = 2. D = 9.75mm. H = 3.00mm
- C = 3. D = 10.41mm. H = 3.00mm

For other options consult the Sales Office