

1.27mm DUAL ROW FEMALE HEADER





1286 SERIES. 1.27 x 2.54mm(0.050 x 0.50"). For PCB Solder

Features

- Available in 6 through 100 circuits
- Insulator Material: Nylon 6-T UL 94V-0
- Mates with 1.27 X 2.54mm Pitch and 0.46mm square or round pin header
- Profile: 4.60mm
- Low profile and High density
- High reliability contact in phosphor bronze
- For other options consult the Sales Office

Dimensional Information

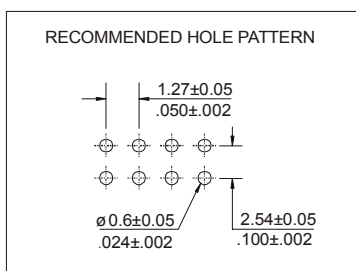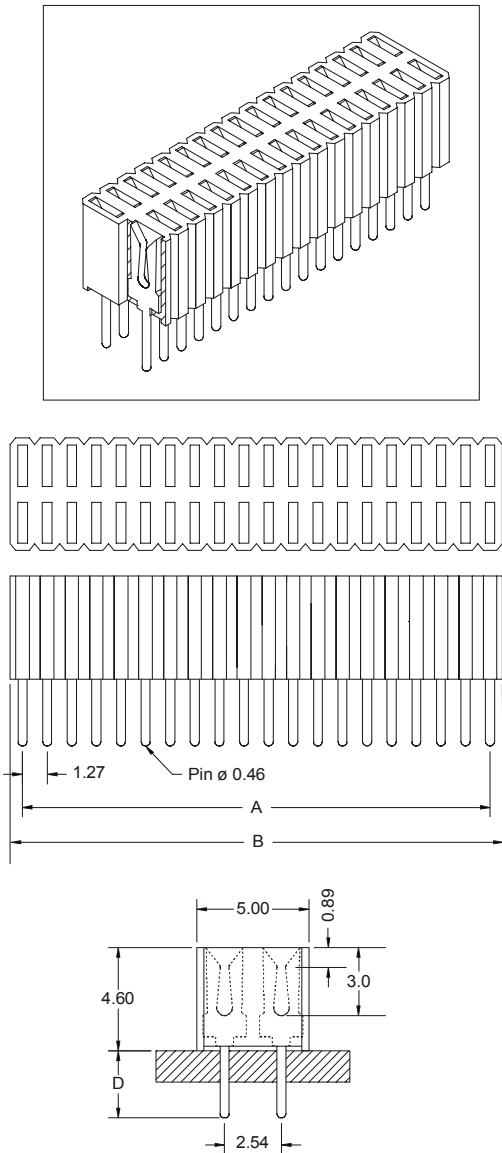

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
06	1286-T06C	2,54 (0,100)	3,81 (0,150)
08	1286-T08C	3,81 (0,150)	5,08 (0,200)
10	1286-T10C	5,08 (0,200)	6,35 (0,250)
12	1286-T12C	6,35 (0,250)	7,62 (0,300)
14	1286-T14C	7,62 (0,300)	8,89 (0,350)
16	1286-T16C	8,89 (0,350)	10,16 (0,400)
18	1286-T18C	10,16 (0,400)	11,43 (0,450)
20	1286-T20C	11,43 (0,450)	12,70 (0,500)
22	1286-T22C	12,70 (0,500)	13,97 (0,550)
24	1286-T24C	13,97 (0,550)	15,24 (0,600)
26	1286-T26C	15,24 (0,600)	16,51 (0,650)
28	1286-T28C	16,51 (0,650)	17,78 (0,700)
30	1286-T30C	17,78 (0,700)	19,05 (0,750)
32	1286-T32C	19,05 (0,750)	20,32 (0,800)
34	1286-T34C	20,32 (0,800)	21,59 (0,850)
36	1286-T36C	21,59 (0,850)	22,86 (0,900)
38	1286-T38C	22,86 (0,900)	24,13 (0,950)
40	1286-T40C	24,13 (0,950)	25,40 (1,000)
42	1286-T42C	25,40 (1,000)	26,67 (1,050)
44	1286-T44C	26,67 (1,050)	27,94 (1,100)
46	1286-T46C	27,94 (1,100)	29,21 (1,150)
48	1286-T48C	29,21 (1,150)	30,48 (1,200)
50	1286-T50C	30,48 (1,200)	31,75 (1,250)
52	1286-T52C	31,75 (1,250)	33,02 (1,300)
54	1286-T54C	33,02 (1,300)	34,29 (1,350)
56	1286-T56C	34,29 (1,350)	35,56 (1,400)
58	1286-T58C	35,56 (1,400)	36,83 (1,450)
60	1286-T60C	36,83 (1,450)	38,10 (1,500)
62	1286-T62C	38,10 (1,500)	39,37 (1,550)
64	1286-T64C	39,37 (1,550)	40,64 (1,600)
66	1286-T66C	40,64 (1,600)	41,91 (1,650)
68	1286-T68C	41,91 (1,650)	43,18 (1,700)
70	1286-T70C	43,18 (1,700)	44,45 (1,750)
72	1286-T72C	44,45 (1,750)	45,72 (1,800)
74	1286-T74C	45,72 (1,800)	46,99 (1,850)
76	1286-T76C	46,99 (1,850)	48,26 (1,900)
78	1286-T78C	48,26 (1,900)	49,53 (1,950)
80	1286-T80C	49,53 (1,950)	50,80 (2,000)
82	1286-T82C	50,80 (2,000)	52,07 (2,050)
84	1286-T84C	52,07 (2,050)	53,34 (2,100)
86	1286-T86C	53,34 (2,100)	54,61 (2,150)
88	1286-T88C	54,61 (2,150)	55,88 (2,200)
90	1286-T90C	55,88 (2,200)	57,15 (2,250)
92	1286-T92C	57,15 (2,250)	58,42 (2,300)
94	1286-T94C	58,42 (2,300)	59,69 (2,350)
96	1286-T96C	59,69 (2,350)	60,96 (2,400)
98	1286-T98C	60,96 (2,400)	62,23 (2,450)
100	1286-T00C	62,23 (2,450)	63,50 (2,500)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

C = Pin Length

- C = 1. D = 2.40mm
- C = 2. D = 3.00mm
- C = 3. D = 1.50mm