

5.08mm SINGLE ROW BREAKAWAY HEADER




5087 SERIES 5.08mm (0.200") Square Pin. For PCB Solder

Features

- Available in 1 through 20 circuits
- Insulator Material: Nylon 6/6 UL 94V-0
- 1.14mm(.045") square pin in tinned brass
- Easy breakaway to desired circuits
- Mates with 5080, 5081, 1507, 1508 and 1509 series Headers
- With standoff minimise flux retention
- Pin omit options are available
- Different pin lengths are available

Dimensional Information

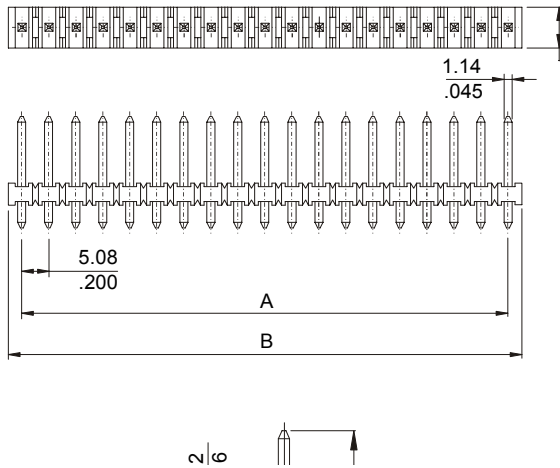

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
01	5087-201C		5.00 (0.196)
02	5087-202C	5.08(0,200)	10.16(0,400)
03	5087-203C	10.16(0,400)	15.24(0,600)
04	5087-204C	15.24(0,600)	20.32(0,800)
05	5087-205C	20.32(0,800)	25.40(1,000)
06	5087-206C	25.40(1,000)	30.48(1,200)
07	5087-207C	30.48(1,200)	35.56(1,400)
08	5087-208C	35.56(1,400)	40.64(1,600)
09	5087-209C	40.64(1,600)	45.72(1,800)
10	5087-210C	45.72(1,800)	50.80(2,000)
11	5087-211C	50.80(2,000)	55.88(2,200)
12	5087-212C	55.88(2,200)	60.96(2,400)
13	5087-213C	60.96(2,400)	66.04(2,600)
14	5087-214C	66.04(2,600)	71.12(2,800)
15	5087-215C	71.12(2,800)	76.20(3,000)
16	5087-216C	76.20(3,000)	81.28(3,200)
17	5087-217C	81.28(3,200)	86.36(3,400)
18	5087-218C	86.36(3,400)	91.44(3,600)
19	5087-219C	91.44(3,600)	96.52(3,800)
20	5087-220C	96.52(3,800)	101.60(4,000)

C = Dimensiones del pin

- C = 1. Dim. H = 10.25 mm. ; D = 3.50 mm
- C = 2. Dim. H = 16.16 mm. ; D = 3.50 mm
- C = 3. Dim. H = 23.20 mm. ; D = 3.50 mm
- C = 4. Dim. H = 15.60 mm. ; D = 5.00 mm
- C = 5. Dim. H = 6.50 mm. ; D = 3.50 mm

