

# 14.80mm FOOTPRINT D-SUB RECEPTACLE



## 8017 SERIES PCB Solder Right Angle D-Sub

### Features

- Available in 9, 15, 25 and 37 Circuits
- Insulator Material: Glass Filled Polyester UL 94V-0
- Contact Material: Phosphor bronze with different plating
- Shell: Steel, Tin Plated as standard
- Standard connector C = 1 (Riveted ground hooks with 4-40 UNC open)
- For other options consult the Sales Office

### Dimensional Information

### Ordering and Dimensional Information


Circuit Size	Part Number	Dimension			
		A	B	C	D
9	8017 - T091	16.33 (0.643)	25.00 (0.984)	30.80 (1.213)	6.96 (0.274)
15	8017 - T151	24.66 (0.971)	33.30 (1.311)	39.20 (1.543)	6.96 (0.274)
25	8017 - T251	38.38 (1.511)	47.10 (1.854)	53.10 (2.091)	6.91 (0.272)
37	8017 - T371	54.84 (2.159)	63.50 (2.500)	69.40 (2.732)	6.82 (0.289)

### T = Contact Plating

- T = 3. Gold flash over 50µ" nickel.
- T = 4. 10µ" gold over 50µ" nickel
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

### C = Hardware Options

- C = 1. Riveted ground hooks pre-loaded 4.40 UNC Hex screws (standard)
- C = 0. Riveted ground hooks with 4.40 UNC thread

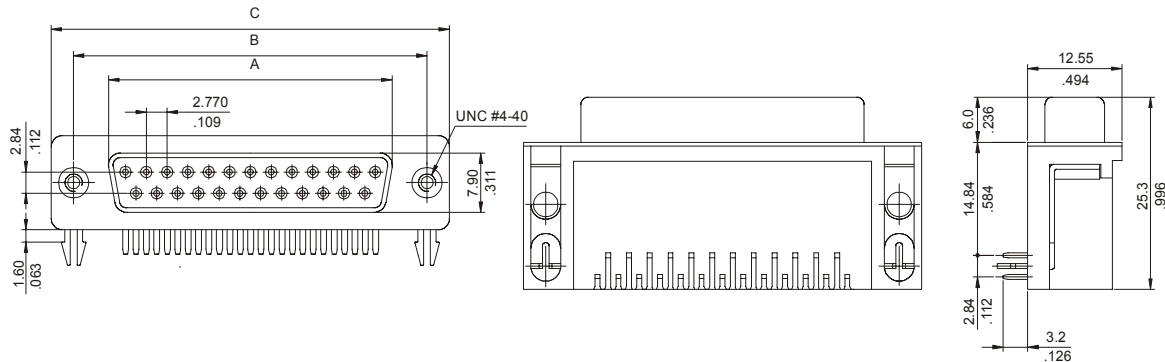

### RECOMMENDED HOLE PATTERN

