

# SINGLE ROW CRIMP CONNECTOR SYSTEM




## 2866 SERIES 2.54mm (0.100") Single Row Connector

### Features

- Available in 2 through 12 circuits
- Insulation Material: Glass filled polyester UL 94V-0
- Available with polarising and locking latch
- Accepts 2870 series crimp terminal
- Mates with 2.54mm pitch single row headers and 2867 and 2868 series headers


### Dimensional Information

### Ordering and Dimensional Information

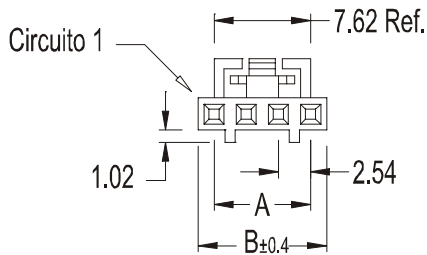

| Circuit Size | Part Number      | Dimensions   |              |
|--------------|------------------|--------------|--------------|
|              |                  | A            | B            |
| 02           | <b>2866-202C</b> | 2,54(0,100)  | 5,05(0,199)  |
| 03           | <b>2866-203C</b> | 5,08(0,200)  | 7,59(0,299)  |
| 04           | <b>2866-204C</b> | 7,62(0,300)  | 10,13(0,399) |
| 05           | <b>2866-205C</b> | 10,16(0,400) | 12,67(0,499) |
| 06           | <b>2866-206C</b> | 12,70(0,500) | 15,21(0,599) |
| 07           | <b>2866-207C</b> | 15,24(0,600) | 17,75(0,699) |
| 08           | <b>2866-208C</b> | 17,78(0,700) | 20,29(0,799) |
| 09           | <b>2866-209C</b> | 20,32(0,800) | 22,83(0,899) |
| 10           | <b>2866-210C</b> | 22,86(0,900) | 25,37(0,999) |
| 11           | <b>2866-211C</b> | 25,40(1,000) | 27,91(1,099) |
| 12           | <b>2866-212C</b> | 27,94(1,100) | 30,45(1,199) |

### Posición pestañas de anclaje



2P

3P

