

RIGHT ANGLE FRICTION LOCK HEADER




2532 SERIES 2.54mm (0.100") For PCB Solder.

Features

- Available in 2 through 20 circuits
- Insulator Material: Nylon 6/6 UL 94V-2
- Contact Material: 0.64mm(.025") square pin in Brass
- Mates with 2544-A and 2544-B series socket
- Polarised with locking ramp

Dimensional Information:

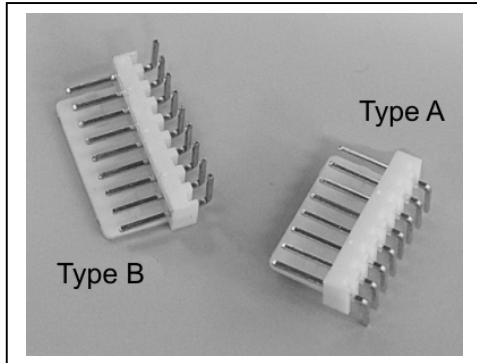

Dimensional and Ordering Information:

Circuit Size	Part Number		Dimensions	
	Type A	Type B	A	B
02	2532-T021	2532-T022	2,54(0,100)	5,08(0,200)
03	2532-T031	2532-T032	5,08(0,200)	7,62(0,300)
04	2532-T041	2532-T042	7,62(0,300)	10,16(0,400)
05	2532-T051	2532-T052	10,16(0,400)	12,70(0,500)
06	2532-T061	2532-T062	12,70(0,500)	15,24(0,600)
07	2532-T071	2532-T072	15,24(0,600)	17,78(0,700)
08	2532-T081	2532-T082	17,78(0,700)	20,32(0,800)
09	2532-T091	2532-T092	20,32(0,800)	22,86(0,900)
10	2532-T101	2532-T102	22,86(0,900)	25,40(1,000)
11	2532-T111	2532-T112	25,40(1,000)	27,94(1,100)
12	2532-T121	2532-T122	27,94(1,100)	30,48(1,200)
13	2532-T131	2532-T132	30,48(1,200)	33,02(1,300)
14	2532-T141	2532-T142	33,02(1,300)	35,56(1,400)
15	2532-T151	2532-T152	35,56(1,400)	38,10(1,500)
16	2532-T161	2532-T162	38,10(1,500)	40,64(1,600)
17	2532-T171	2532-T172	40,64(1,600)	43,18(1,700)
18	2532-T181	2532-T182	43,18(1,700)	45,72(1,800)
19	2532-T191	2532-T192	45,72(1,800)	48,26(1,900)
20	2532-T201	2532-T202	48,26(1,900)	50,80(2,000)

T = Plating Options

- T = 2. Tin Plated.
- T = 3. Gold flash over 30-50µ" nickel overall
- T = 5. 15µ" gold over 30-50µ" nickel overall
- T = 6. 30µ" gold over 30-50µ" nickel overall

