

SINGLE ROW CRIMP CONNECTOR SYSTEM


2866 SERIES 2.54mm (0.100") Single Row Connector

Features

- Available in 2 through 12 circuits
- Insulation Material: Glass filled polyester UL 94V-0
- Available with polarising and locking latch
- Accepts 2870 series crimp terminal
- Mates with 2.54mm pitch single row headers and 2867 and 2868 series headers

Dimensional Information

Ordering and Dimensional Information

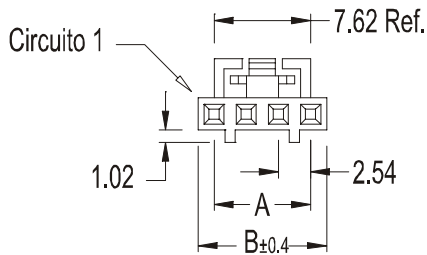




Circuit Size	Part Number	Dimensions	
		A	B
02	2866-202C	2,54(0,100)	5,05(0,199)
03	2866-203C	5,08(0,200)	7,59(0,299)
04	2866-204C	7,62(0,300)	10,13(0,399)
05	2866-205C	10,16(0,400)	12,67(0,499)
06	2866-206C	12,70(0,500)	15,21(0,599)
07	2866-207C	15,24(0,600)	17,75(0,699)
08	2866-208C	17,78(0,700)	20,29(0,799)
09	2866-209C	20,32(0,800)	22,83(0,899)
10	2866-210C	22,86(0,900)	25,37(0,999)
11	2866-211C	25,40(1,000)	27,91(1,099)
12	2866-212C	27,94(1,100)	30,45(1,199)

Posición pestañas de anclaje



2P

3P

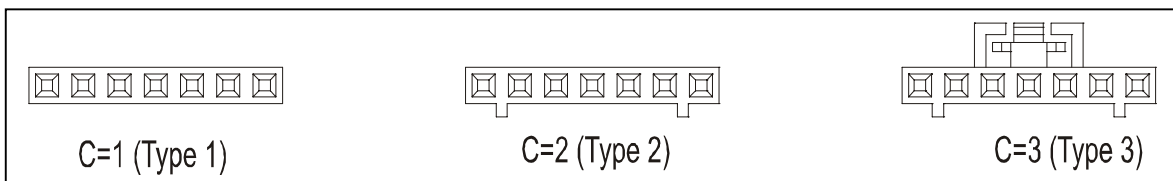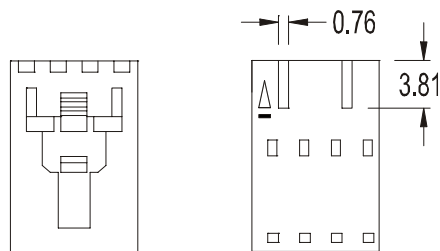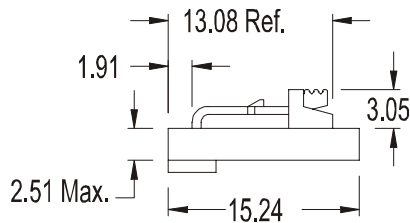

C=1 (Type 1)

C=2 (Type 2)

C=3 (Type 3)