

3.00mm FOOT PRINT SMT D-SUB PLUG



8135 SERIES PCB Solder Low Profile

Features

- Available in 9 Circuits
- Insulator Material: Glass Filled Polyester UL 94V-0
- Contact Material: Brass
- Shell: Steel, Tin Plated as standard
- Standard Connector C = 1 (Riveted Ground Hooks with 4-40 UNC Thread)
- For other Options Consult the Sales Office

Dimensional Information

Ordering and Dimensional Information





8135 - T09C

T = Contact Plating

- T = 3 Gold Flash over 50μ" Nickel
- T = 4 10μ" Gold over 50μ" Nickel
- T = 5 15μ" Gold over 50μ" Nickel
- T = 6 30μ" Gold over 50μ" Nickel

C = Hardware Options

- C = 1 Riveted Ground Hooks Pre-Loaded 4.40 UNC Hex Screws (Standard)
- C = 0 Riveted Ground Hooks with 4.40 UNC Thread

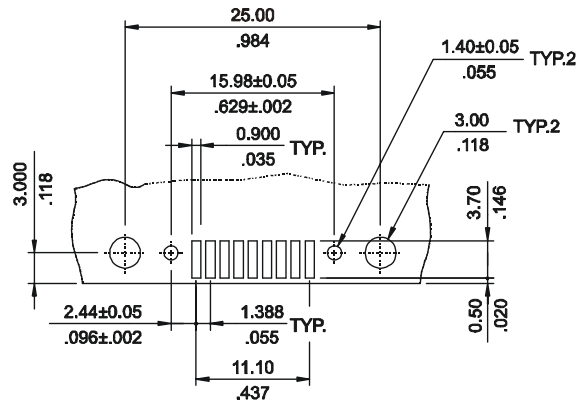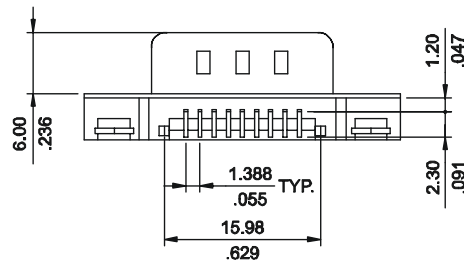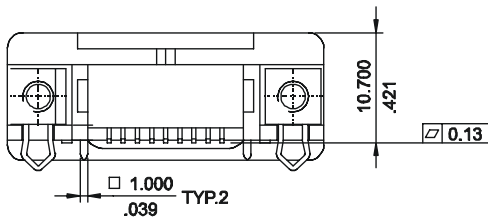

SOLDER PAD PATTERN

