

3.00mm FOOT PRINT SMT D-SUB RECEPTACLE



8136 SERIES PCB Solder Low Profile

Features

- Available in 25 Circuits
- Insulator Material: Glass Filled Polyester UL 94V-0
- Contact Material: Brass
- Shell: Steel, Tin Plated as standard
- Standard Connector C = 1 (Riveted Ground Hooks with 4-40 UNC Thread)
- For other options Consult the Sales Office

Dimensional Information

Ordering and Dimensional Information





8136 - T25C

T = Contact Plating

- T = 3 Gold Flash over 50 μ m Nickel
- T = 4 10 μ m Gold over 50 μ m Nickel
- T = 5 15 μ m Gold over 50 μ m Nickel
- T = 6 30 μ m Gold over 50 μ m Nickel

C = Hardware Options

- C = 1 Riveted Ground Hooks Pre-Loaded 4.40 UNC Hex Screws (Standard)
- C = 0 Riveted Ground Hooks with 4.40 UNC Thread

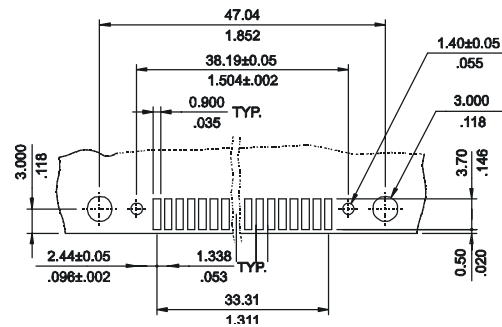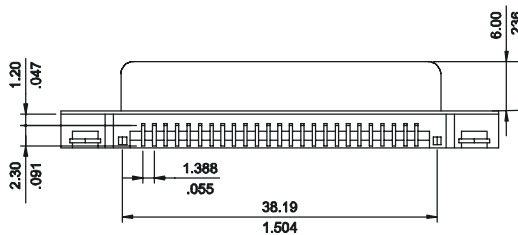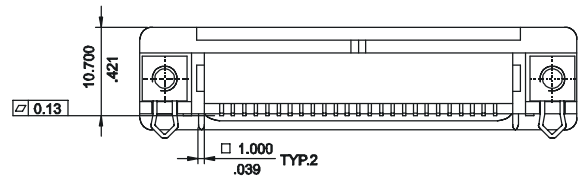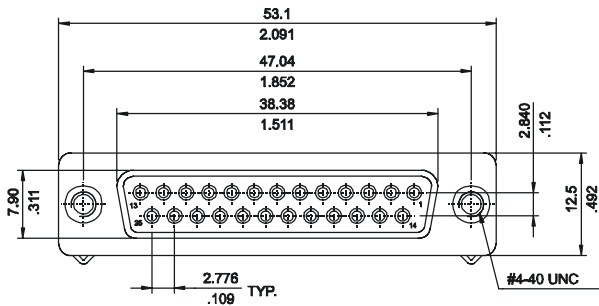

SOLDER PAD PATTERN

