

5.33mm FOOTPRINT D-SUB PLUG



8004 SERIES PCB Solder Low Profile





Features

- Available in 9 Circuits
- Insulator Material: Glass Filled Polyester UL 94V-0
- Contact Material: Brass
- Different plating options are available
- Shell: Steel, tin plated as standard
- Standard connector C = 1 (Riveted ground hooks 4-40 UNC thread)
- For other options consult the Sales Office

Dimensional Information

Ordering

8004 - T09C

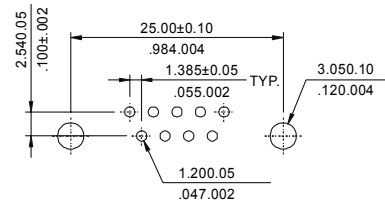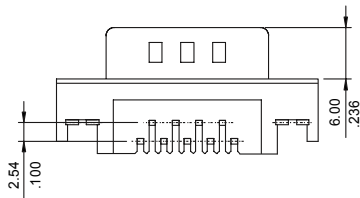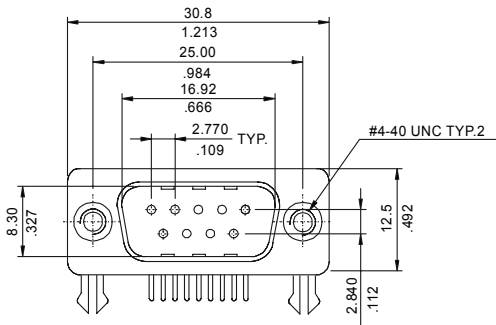

RECOMMENDED HOLE PATTERN

T = Contact Plating

- T = 3. Gold flash over 50µ" nickel.
- T = 4. 10µ" gold over 50µ" nickel
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

C = Hardware Options

- C = 1. Riveted ground hooks pre-loaded 4:40 UNC Hex Screws
- C = 0. Riveted ground hooks with 4:40 UNC thread