

# RIGHT ANGLE D-SUB RECEPTACLE SMT



## 8132 SERIES PCB Solder Low Profile

### Features

- Available in 9 and 25 Circuits
- Insulator Material: Glass Filled Nylon 6T UL 94V-0
- Contact Material: Gold Brass
- Different Plating Options are available
- Shell: Steel, Tin Plated as standard
- Standard Connector C = 1 (Riveted Ground Hooks with 4-40 UNC Thread)
- For other Options Consult the Sales Office

### Dimensional Information

### Ordering and Dimensional Information

Circuit Size	Part Number
9	8132 - T09C
25	8132 - T25C

### T = Contact Plating



- T = 3 Gold Flash over 50µ" Nickel
- T = 4 10µ" Gold over 50µ" Nickel
- T = 5 15µ" Gold over 50µ" Nickel
- T = 6 30µ" Gold over 50µ" nickel

### C = Hardware Options

- C = 1 Riveted Ground Hooks pre-loaded 4.40 UNC Hex Screws
- C = 0 Riveted Ground Hooks with 4.40 UNC Thread

### 9 CIRCUITS

### 25 CIRCUITS

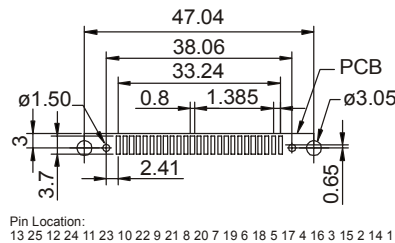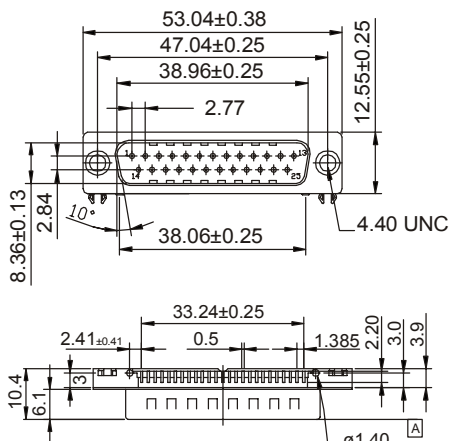

RECOMMENDED HOLE PATTERN

