


RIGHT ANGLE D-SUB CONNECTOR

8098-8099 SERIES Right Angle PCB Solder Slim Version

Features

- Available in 9 and 25 Cir Female and 9 Cir Male
- Insulator Material: Glass Filled Thermoplastic UL 94V-0
- Metal shell: Tin plated
- Contact Material: Phosphor Bronze
- Rear Fully Insulated
- Available in Different Plating Options
- The Standard Version Includes: Grounding Tag L2 with 4-40 UNC Clinch Nut
- For further Options please Contact our Sales Department

Dimensional Information

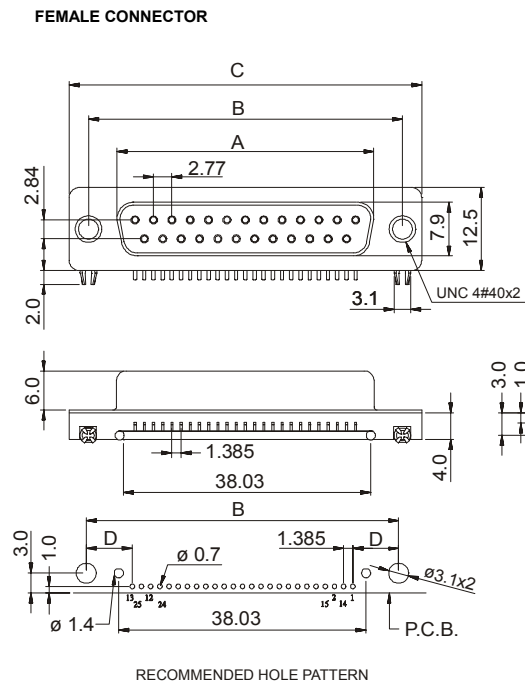

Ordering and Dimensional Information

Female Connector

Circuits		Dimensions			
		A	B	C	D
9	8098-T09C	16.30 (0.642)	25.00 (0.984)	30.80 (1.212)	6.95 (0.273)
25	8098-T25C	38.30 (1.507)	47.10 (1.854)	53.10 (2.090)	6.93 (0.272)

Male Connector

Circuits		A	B	C	D
		9	8099-T09C	19.92 (0.784)	25.00 (0.984)

T = Contact Plating

- T = 3 Gold Flash over 1.27μ" Ni.
- T = 4 0.25μ" Gold over 1.27μ" Ni.
- T = 5 0.50μ" Gold over 1.27μ" Ni.
- T = 6 0.75μ" Gold over 1.27 μ" Ni.

C = Connector Options

- C = 1 With Grounding Tag L2 and 4-40 UNC Clinch Nut
- C = 0 With Grounding Tag L2 and 4-40 UNC Threaded Insert

MALE CONNECTOR

