



FEMALE CONEX-FLEX CONNECTOR

1330 SERIES 2.54mm (0.100") Wire Mount

Features

- Available in 4, 6, 8, 10, 12, 14, 16, 18, 20 and 26 circuits
- Insulator Material: PBT, glass reinforced, UL 94V-0
- Contact Material: Phosphor bronze tin plated
- Current Rating: 1 Amp DC
- Contact Resistance: 30 mΩ maximum
- Insulation Resistance: 3.000 MΩ minimum
- Dielectric Withstanding Voltage: 500V AC for 1 minute
- Operation Temperature: -40°C to +105°C
- Terminated with 1.27mm pitch flat ribbon cable
- Mates with the 1332 and 1333 series

Dimensional Information

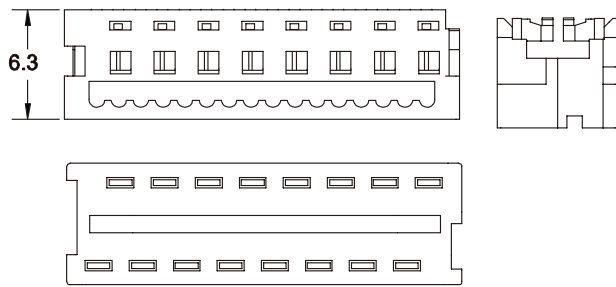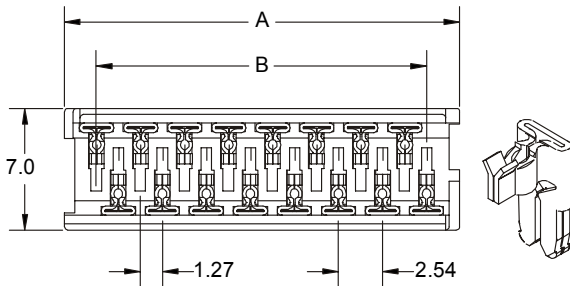

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
04	1330-2041	7.59 (0.299)	3.81 (0.150)
06	1330-2061	10.13 (0.399)	6.35 (0.250)
08	1330-2081	12.67 (0.499)	8.89 (0.350)
10	1330-2101	15.21 (0.599)	11.43 (0.450)
12	1330-2121	17.75 (0.699)	13.97 (0.550)
14	1330-2141	20.29 (0.799)	16.51 (0.650)
16	1330-2161	22.83 (0.899)	19.05 (0.750)
18	1330-2181	25.37 (0.999)	21.59 (0.850)
20	1330-2201	27.91 (1.099)	24.13 (0.950)
26	1330-2261	35.53 (1.399)	31.75 (1.250)

T = Contact Plating

- T = **2.** Tin plated
- T = **3.** Gold flash over 50μ" nickel.
Recommended Finish
- T = **5.** 15μ" gold over 50μ" nickel
- T = **6.** 30μ" gold over 50μ" nickel

E = Packing Options

- E = **1.** Tube + Pad
- E = **2.** Reel + Pad