

SINGLE ROW CRIMP CONNECTOR HOUSING



1160 SERIES. 1.25 mm. (0.049") Pitch.




General Features

- Available in 2 through 20 and 30 circuits
- Mates with 1.25 mm header 1161 series
- Latch housing secure terminal in housing and provide extra terminal retention
- Use crimp terminal 1163

Materials

- Insulator: Polyester UL 94 V-0
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensional Information

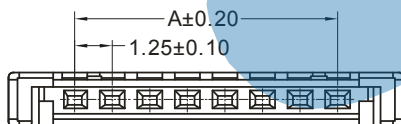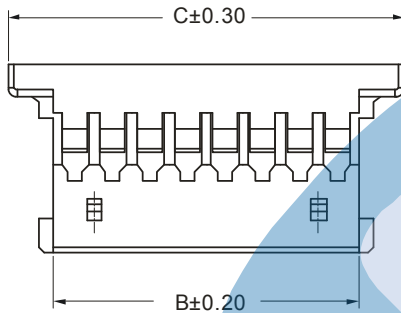

1160 - 2 - XX - 1
1 2 3

1. Connector Serie

3. (XX) Number Of Contacts

- Available in 2 through 20 and 30 circuits

Dimensions:

A = 1.25 x (XX-1)
B = 1.25 x (XX)+0.22
C = 1.25 x (XX)+3.22