

1.00mm HORIZONTAL DIP LIF CONNECTOR





1763 SERIES. 1.00mm(0.039"). For PCB solder

Features

- Available in 4 through 32 circuits
- Insulator Material: Nylon 6T UL 94V-0
- Contact Material: Phosphor Bronze
- Low insertion force and high contact pressure
- Applicable FPC and FFC: Thickness 0.30mm(.012")


Dimensional Information

Ordering and Dimensional Information

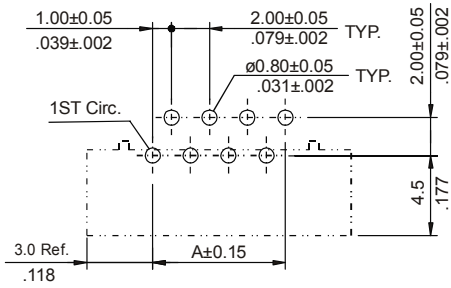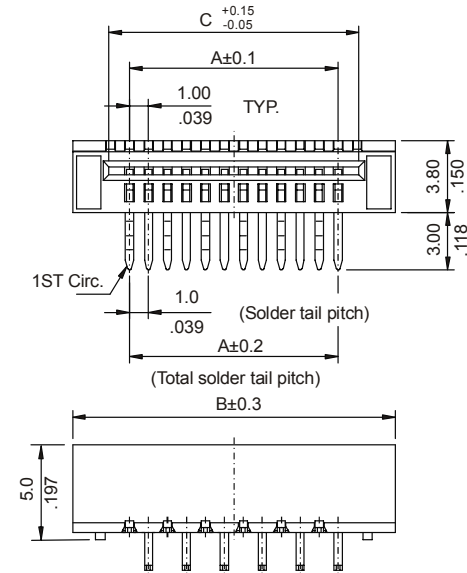


Recommended P.C. Board Layout


Circuit Size	Part Number		DIMENSIONS		
	Upside contact	Downside cont.	A	B	C
04	1763-2041	1763-2042	3,00(0,118)	10,20(0,402)	5,20(0,205)
05	1763-2051	1763-2052	4,00(0,157)	11,20(0,441)	6,20(0,244)
06	1763-2061	1763-2062	5,00(0,197)	12,20(0,480)	7,20(0,283)
07	1763-2071	1763-2072	6,00(0,236)	13,20(0,520)	8,20(0,323)
08	1763-2081	1763-2082	7,00(0,276)	14,20(0,559)	9,20(0,362)
09	1763-2091	1763-2092	8,00(0,315)	15,20(0,598)	10,20(0,402)
10	1763-2101	1763-2102	9,00(0,354)	16,20(0,638)	11,20(0,441)
11	1763-2111	1763-2112	10,00(0,394)	17,20(0,677)	12,20(0,480)
12	1763-2121	1763-2122	11,00(0,433)	18,20(0,717)	13,20(0,520)
13	1763-2131	1763-2132	12,00(0,472)	19,20(0,756)	14,20(0,559)
14	1763-2141	1763-2142	13,00(0,512)	20,20(0,795)	15,20(0,598)
15	1763-2151	1763-2152	14,00(0,551)	21,20(0,835)	16,20(0,638)
16	1763-2161	1763-2162	15,00(0,591)	22,20(0,874)	17,20(0,677)
17	1763-2171	1763-2172	16,00(0,630)	23,20(0,913)	18,20(0,717)
18	1763-2181	1763-2182	17,00(0,669)	24,20(0,953)	19,20(0,756)
19	1763-2191	1763-2192	18,00(0,709)	25,20(0,992)	20,20(0,795)
20	1763-2201	1763-2202	19,00(0,748)	26,20(1,031)	21,20(0,835)
21	1763-2211	1763-2212	20,00(0,787)	27,20(1,071)	22,20(0,874)
22	1763-2221	1763-2222	21,00(0,827)	28,20(1,110)	23,20(0,913)
23	1763-2231	1763-2232	22,00(0,866)	29,20(1,150)	24,20(0,953)
24	1763-2241	1763-2242	23,00(0,906)	30,20(1,189)	25,20(0,992)
25	1763-2251	1763-2252	24,00(0,945)	31,20(1,228)	26,20(1,031)
26	1763-2261	1763-2262	25,00(0,984)	32,20(1,268)	27,20(1,071)
27	1763-2271	1763-2272	26,00(1,024)	33,20(1,307)	28,20(1,110)
28	1763-2281	1763-2282	27,00(1,063)	34,20(1,346)	29,20(1,150)
29	1763-2291	1763-2292	28,00(1,102)	35,20(1,386)	30,20(1,189)
30	1763-2301	1763-2302	29,00(1,142)	36,20(1,425)	31,20(1,228)
31	1763-2311	1763-2312	30,00(1,181)	37,20(1,465)	32,20(1,268)
32	1763-2321	1763-2322	31,00(1,220)	38,20(1,504)	33,20(1,307)

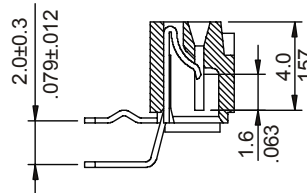



Downside contact

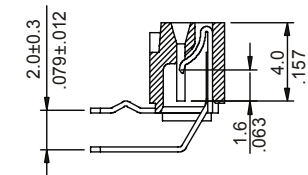

Upside contact

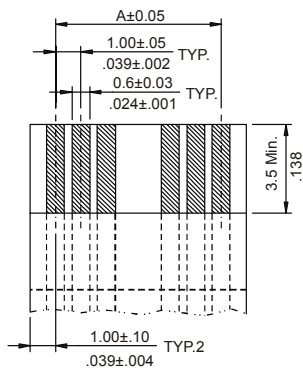

* ACCOMMODATED FFC

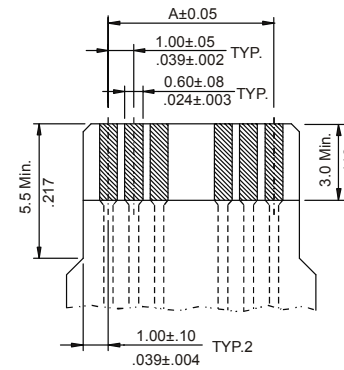

* ACCOMMODATED FPC

