

# TOP ENTRY PCB MOUNT D-SUB PLUG



## 8010 SERIES PCB Solder

### Features

- Available in 9, 15, 25, 37 and 50 Circuits
- Insulator Material: Glass Filled Polyester UL 94V-0
- Contact Material: Brass
- Different plating options are available
- Shell: Steel, Tin Plated as standard
- Optional: 4-40 UNC hexagonal standoff or clinch nuts
- Other options: Hoods, mounting screw and accessories
- For other options consult the Sales Office

### Dimensional Information

### Ordering and Dimensional Information


Circuit Size	Part Number	Dimensions			
		A	B	C	D
9	<b>8010 - T09C</b>	16.92 (0.666)	24.99 (0.984)	30.81 (1.213)	19.23 (0.757)
15	<b>8010 - T15C</b>	25.25 (0.994)	33.32 (1.312)	39.14 (1.541)	27.56 (1.085)
25	<b>8010 - T25C</b>	38.96 (1.534)	47.04 (1.852)	53.04 (2.088)	41.28 (1.625)
37	<b>8010 - T37C</b>	55.42 (2.182)	63.50 (2.500)	69.32 (2.729)	57.73 (2.273)
50	<b>8010 - T50C</b>	52.81 (2.079)	61.11 (2.406)	66.93 (2.635)	55.12 (2.170)

### T = Contact Plating

- T = 3. Gold flash over 50µ" nickel.
- T = 4. 10µ" gold over 50µ" nickel
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

### C = Hardware Options

- C = 1. Standard with 3.05mm(.012") dia. mount hole
- C = 3. Whit riveted 4-40 UNC clinch nuts 6.00mm thickness **T2**
- C = 4. Whit riveted retaining clip ground strap 5.00mm thickness **T1**
- C = 5. With 4.40 UNC hexagonal standoff **D2**

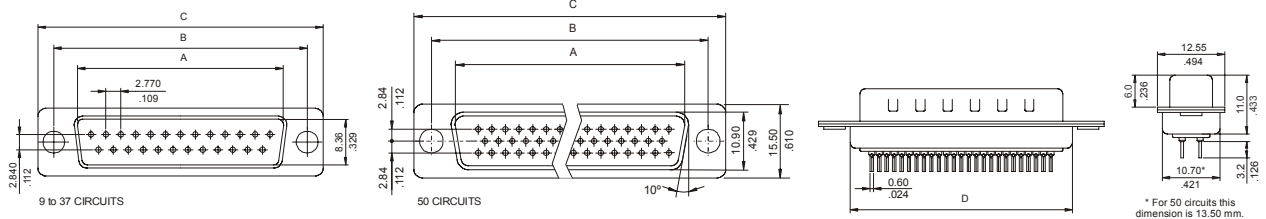

### RECOMMENDED HOLE PATTERN

